



## LAYOUT

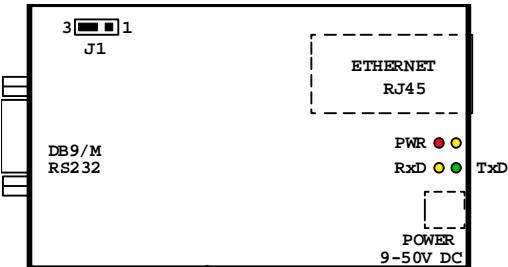

J1      1-2 connected DSR  
2-3 connected CTS (default)

## CONNECTORS

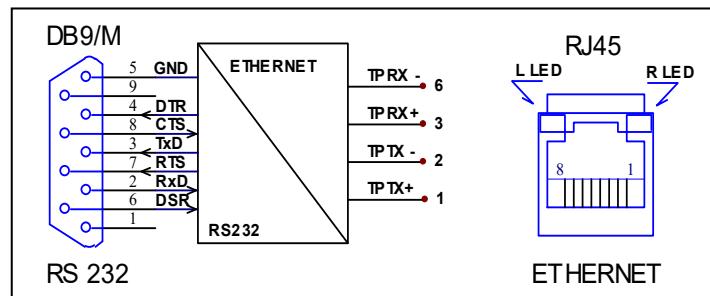

## CONDITIONS OF WARRANTY

ComErgon provides full warranty of 24 month for serial interface module PRO 4.0/232 starting on the day of purchase. The warranty is except for the cases in which the functioning of the module has been affected by faulty manipulation, natural catastrophes or other external factors.



Note: Default port: 10 001  
valid range 1025-9998, 10000-13999, 14010-30703 a 30719-65535

# PRO 4.0/232 LTRX

converter

## RS 232 - Ethernet

### TECHNICAL DATA

ethernet module	XPort LANTRONIX
protocol	TCP, IP, UDP, ARP, ICMP, Ethernet MAC Telnet TFTP, AutoIP, DHCP, HTTP, SNMP 10/100 Base-T Ethernet Ver.2.0/IEEE802.3
network interface	RS 232 - full duplex
serial port	8N1, 8O1, 8E1, 7O1, 7E1, 7N1
data format	8N2, 8O2, 8E2, 7O2, 7E2, 7N2
data control	None, XON/XOFF, CTS/RTS
transfer rate	300b/s – 230kb/s
transferred signals	RxD, TxD
local signals	RTS, DTR + selectable DSR/CTS
encryption	AES Rijndael option - 128, 192 alebo 256bit
setting	Internal web server (384kB), SNMP, Telnet login, serial login
optical indication	RxD, TxD, PWR, Link activity
connector supply	half duplex, full duplex
supply	plug 1.3mm
dimension	9 - 50V DC / max 2W 95 x 35 x 50 mm